



Swedish  
Production

## FOOD TRANSPORT



# Temptainer Premium

Temptainer Premium is our latest contribution of high-quality stainless steel boxes from Hallins. Our purposes are the same as before - to create the best conditions to preserve the essence of good food, all the way from kitchen to the table.

Our first step is to launch Temptainer Premium in four models, Single H12, H14, CC12 and Tower H6+CC6. They have the same good features and performances as the previous generations but in a completely new design and equipped with several new details and functionality.

Some of the following news of the Temptainer Premium are, vertical steering handles as standard, digital regulator with touch display, new ergonomic door handle, flat hygienic top, food approved sealing in the door.



temptainer®  
BY HALLINS




Temptainer Premium has a fully welded inner cabinet with pressed guides for maximum hygiene and durability.

The heating and cooling units are located in the back of the trolley which provides optimal air circulation and temperature as well as simple service and maintenance. The trolley is equipped with large ball-bearing wheels for easy maneuvering.

ACCESSORIES: Digital regulator with Bluetooth, lockable door, centralbrake, 200 mm wheels, towing system, foil in different colors, e.tc.



	SINGLE HEATING H12	SINGLE HEATING H14	SINGLE COOLING CC12	TOWER HEATING + COOLING H6+CC6
Product number code (PNC)	M7000012AXA	M7000014AXA	M7000012BXA	M7000066ABA
Number of guides	12	14	12	6 + 6
Capacity GN containers	12 x 1/1-65 or 6 x 1/1-150	14 x 1/1-65 or 7 x 1/1-150	12 x 1/1-65 or 6 x 1/1-150	6+6 x 1/1-65 or 3+3 x 1/1-150
Distance between guides, mm	80	80	80	80
Capacity, max liter	120	140	120	60+60
Weight, kg	70	75	83	99
Electric connection	220-240 V AC/ 50-60 Hz / 1100 W	220-240 V AC/ 50-60 Hz / 1100 W	220-240 V AC/ 50-60 Hz / 280 W	220-240 V AC/ 50-60 Hz / 1380 W
Heat up time	15 minutes	15 minutes	-	15 minutes (upper cabinet)
Cool-down time to +3°C (at +25°C)	-	-	15 minutes	15 minutes (lower cabinet)
Regulator	Digital adjustable	Digital adjustable	Digital adjustable	Digital adjustable
Insulation	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan	min 40 mm CFC-free polyurethan
Wheels	160 mm, 2 fixed, 2 steering with brake	160 mm, 2 fixed, 2 steering with brakes	160 mm, 2 fixed, 2 steering with brake	160 mm, 2 fixed, 2 steering with brake
Safety class	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside	IP 55 inside, IP 21 outside
Material	EN 1.4301, polyurethan	EN 1.4301, polyurethan	EN 1.4301, polyurethan	EN 1.4301, polyurethan
Depth (A), mm	800	800	800	800
Depth (B), mm	800	800	889	889
Height (C), mm	1374	1534	1374	1468
<b>Price</b>	<b>2790 EUR</b>	<b>2990 EUR</b>	<b>3950 EUR</b>	<b>4895 EUR</b>

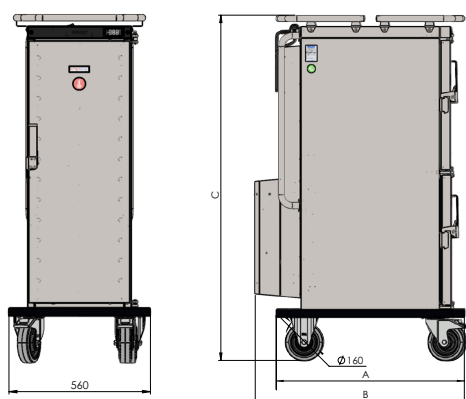

Constant Temperature  
Retention



Hygienic



Stainless



Climate Smart